


Maintenance Instructions ClimaRad MiniBox


Removing and cleaning the ClimaRad MiniBox

How do you maintain your ClimaRad MiniBox?


Depending on its use, the ClimaRad MiniBox must be thoroughly cleaned every 4 years. When used in a very polluted area we recommend that you check every year to see if cleaning is required.

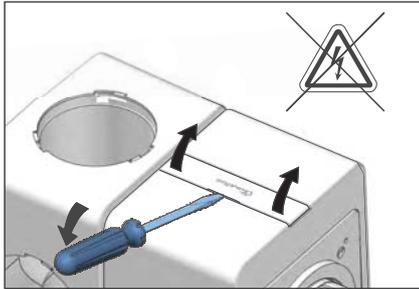


1. Disconnect the power and open the cover of the fan housing using a screwdriver.

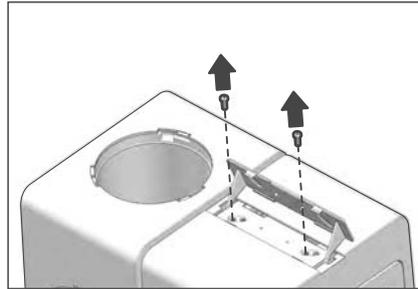


2. Loosen the screws and put them aside.

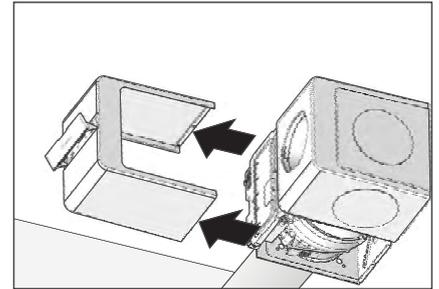


3. Remove the housing by pulling the opened cover upwards.

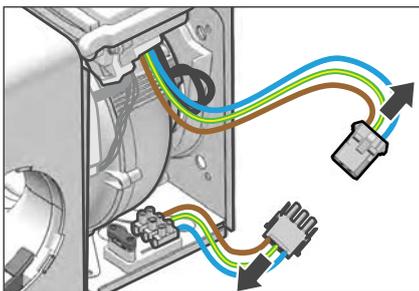


4. Disconnect the 230V plug.

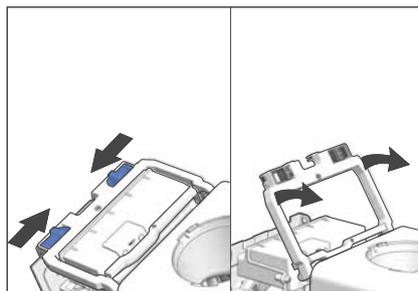


5. Push the two sliders of the bracket toward each other and tilt the bracket upwards to open.

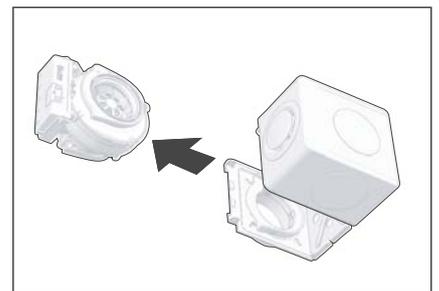


6. Remove the fan from the housing and snap the bracket back into the frame.

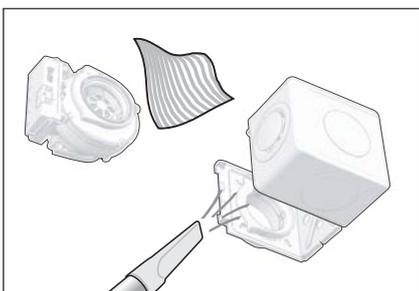

7. Remove any dirt from the channels and fan with a soft, lint-free cloth or vacuum cleaner (do not use water).

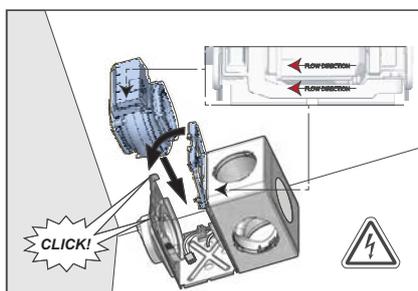

8. Push the fan back into the frame. Squeeze the sliders in the bracket and snap the bracket on both sides to close.

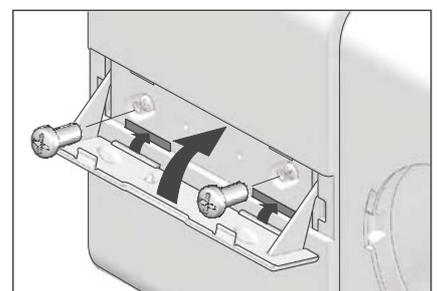

9. Insert the screws in the housing and snap the cover of the fan housing to close.

Connect the 230V plug. Slide the housing back on the fan frame.