
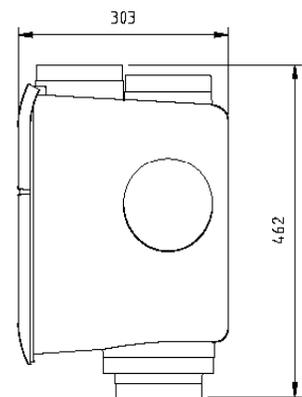


# ClimaRad MaxiBox

The ClimaRad MaxiBox is an extraction box with multiple connections to ventilate the 'wet rooms', such as the bathroom, toilet, laundry room, storage area and kitchen. The MaxiBox offers sound insulation and time control via the ClimaRad ventilation unit. This box is automatically controlled based on humidity and is easy to clean. The ClimaRad (WTW) ventilation unit in the living room and the ClimaRad MaxiBox work together wirelessly.

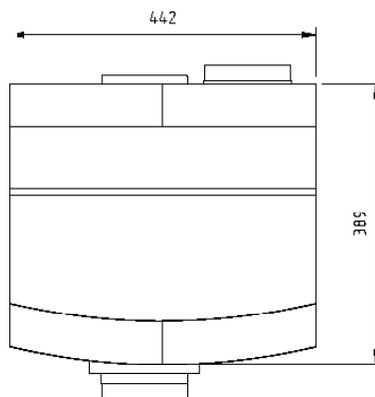

## ClimaRad MaxiBox

Dimensions:	442x462x303 mm (wxhxd)
Connections extraction side:	5 x Ø 125/160
Connection pressure side:	1 x Ø 125
Air flow (max. at 100 Pa):	350 m <sup>3</sup> /h
Sensors:	RH, RF (demand-controlled)
Connected power:	65 W (230 VAC/50Hz)
Electrical protection class:	Class I
Specific power input (SPI):	0,06 W/(m <sup>3</sup> /h)
Standby consumption:	1 W
Accessories:	4-position switch, external CO <sub>2</sub> sensor (RF)
Energy label:	B
Weight:	5,5 kg

## Sound data

Capacity	Pressure	Sound Power suction side	Sound Power
[m <sup>3</sup> /h]	[Pa]	[dB(A)]	[dB(A)]
38	4	24	28
78	12	27	29
171	62	44	39
295	178	57	51
342	241	64	56

## The advantages:

- Unique active sound insulation
- Efficient EC direct current fan
- Easy to clean
- Optional wireless switch or CO<sub>2</sub> sensor (RF)
- Automatic control based on moisture level (RH)
- Automatic control based on CO<sub>2</sub> level
- Time control through ClimaRad WTW unit
- High EPC/EPA reductions

# Accessories (optional)



## ClimaRad external CO<sub>2</sub>-sensor (RF)

The external CO<sub>2</sub> sensor is an option which can be used in combination with the ClimaRad Fan, MiniBox or MaxiBox. By linking an external CO<sub>2</sub> sensor to the ClimaRad ventilation solution, the ventilation will be demand-driven, based on the measured CO<sub>2</sub> level.



## ClimaRad 4-position switch (RF)

By way of the wireless 4-position switch the ClimaRad MaxiBox can be manually operated:

- 1: Low
- 2: Medium
- 3: High
- Auto: Automatic

# ClimaRad®

ClimaRad BV  
Lübeckstraat 25  
7575 EE Oldenzaal  
The Netherlands

Tel. +31 (0) 541 358 130  
e-mail: [info@climrad.com](mailto:info@climrad.com)  
[www.climrad.co.uk](http://www.climrad.co.uk)

View the [ClimaRad Solutions](#) for the residential, commercial and healthcare markets.